


APD 1915 M

Mitsubishi

D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$%



2000/14/EC

& \$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	1915,00	1532,00	1750,00	1400,00	2529,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

E

z

TRANSFER SWITCH

APD 1915 M

Mitsubishi

D+' &'




Manufacturer		Mitsubishi
Model		S16R-PTA
		% \$\$' "# "
		% & \$\$' "
		Q%+& \$\$< DQ
	L	65,370
	"	170 X 180
		14:1
	fl # 7	"# " 1500
	fl 7	L 230,00
		L 350,00
AbsorbedAirDischargeReSourceKey.Text	' # "	128,00
	' # "	1950,00
	' # "	339,00
		24 V d.c.
	Load	\$\$\$
	# "	
		355,00

		ECO46-2S/4
	Hz	50
	"	1800,00
7cg		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 1915 M	13850,00	5200,00	2300,00	2600,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 99	18950	9000	2800	3300/4800	2200

D+' &'

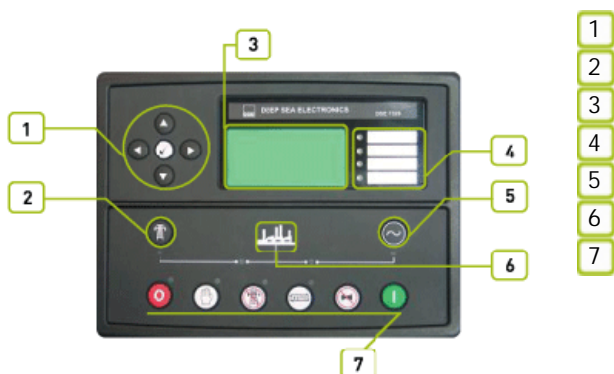

APD 1915 M

Mitsubishi

D+' &'



1

'8G9ž ' + ' &\$ž) 5ž&&\$#&(\$

2

3

4

'8G9+' &\$ ž fi &&\$ ž

"'8G9+' &\$ ž '8G9+' &\$ ž

% &I '* (žFG&' &žFG(,) ž

APD 1915 M

Mitsubishi

D+ & "



f@#@Bt
f@#@@t

"z" "z" "

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

6G'9B '*\$-\$)' \$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

APD 1915 M

Mitsubishi

D+ &''

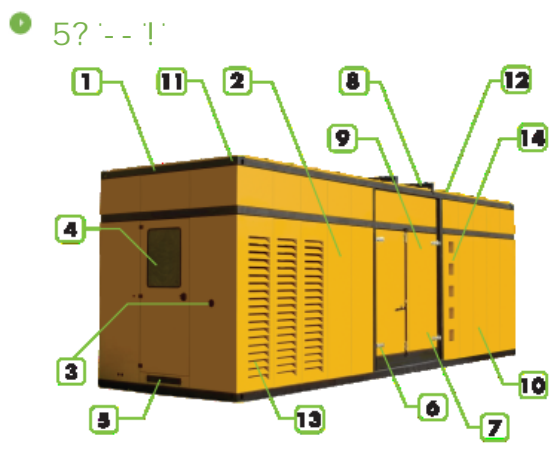

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200