

AC 1410

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' \$", 'D:

	"	"	"	"	Amp
400/230	1410,00	1128,00	1280,00	1024,00	1847,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% %&

GC" \$(*"

z&("

GC

Standard Specifications

z

fl

E

z

ALTERNATOR

fl

fl

E

fl

fl

E

fP \$\$\$# \$\$\$

fl

!" \$ E

E

TRANSFER SWITCH

AC 1410

Cummins
Mecc Alte
D+' &'

1

Manufacturer		Cummins		
Model		KTA 50 G3		
		% \$\$\$' "# "		
		%&&+Z\$\$\$' "		
		0% () Z\$\$\$< DQ		
	L	50,300		
	"	159 x 159		
		13,9:1		
	fl # 7	"# "	1500	
	fl 7	L	177,00	
		L	415,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	104,80		
	' # "	1770,00		
fl ' # 7	' # "	240,70		
	° C	525,00		
		24 V d.c.		
	Load	\$\$\$i	'+) i) \$i
	# "			
		261,00	199,00	139,00

2

		Mecc Alte		
		ECO 43-2LN/4		
	Hz	50		
	"	1300,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1876,00		
Temperature		H		


3

		fl 7		fl 7	
	"	"	"	"	L
AC 1410	9900,00	4860,00	2100,00	2412,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 98	14000	9000	2270	2550/3210	1900

AC 1410

Cummins
Mecc Alte
D+' &'

1 D+' &'

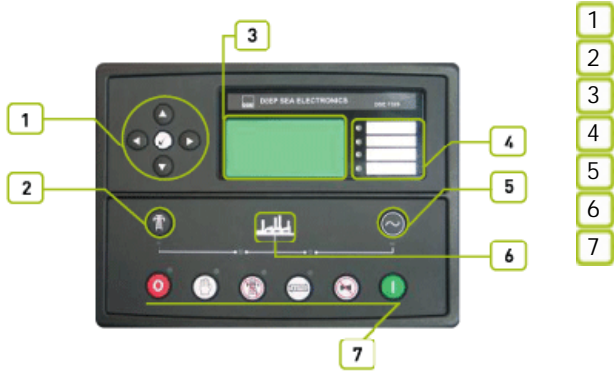

2

8G9ž + &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž ž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 * (

žFG&' &žFG(,) ž

ž

AC 1410

Cummins
Mecc Alte
D+ &''

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 1410

Cummins
Mecc Alte
D+ & "

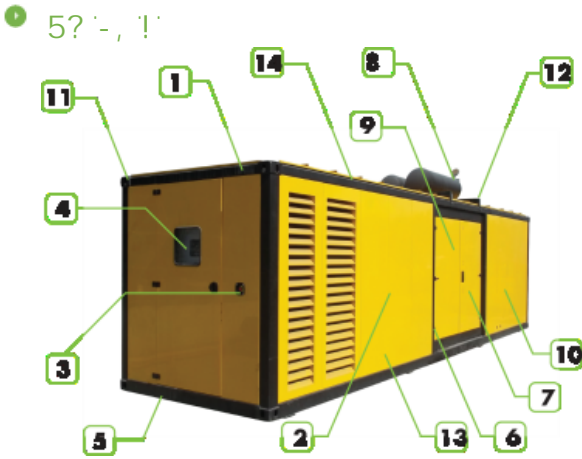

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2270
fl "L	"	9000
fl "L	"	2550/3210
	L	1900