

AD 825

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$' z' \$z' D:

	"	"	"	"	Amp
400/230	825,00	660,00	750,00	600,00	1083,00

fP GDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Ž 5J F

TRANSFER SWITCH

AD 825

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	DP222LC		
		%\$\$' "# "	
		+&' \$\$\$' "	
		G* - \$\$\$< DQ	
	L	21,927	
	"	128 x 142	
		15,0:1	
	fl # 7	"# "	1500
	fl 7	L	40,00
		L	134,80
AbsorbedAirDischargeReSourceKey.Text	' # "		45,00
	' # "		860,00
fl ' # 7	' # "		108,00
	° C		502,00
			24 V d.c.
	Load	%\$\$i	'+) i
	# ") \$i	
		161,00	119,10 79,30


	Mecc Alte		
	ECO 40-VL/4		
	Hz	50	
	"	750,00	
7cg'		0,80	
		3	
	fl 7	400/230	
	A	1083,00	

		fl 7		fl 7	
	"	"	"	"	L
AD 825		3630,00	1550,00	2301,00	1000,00
		fl 7		fl 7	
	"	"	"	"	L
MS 85	5535	5297	1606	2656	1000

AD 825

Doosan
Mecc Alte
D+' &'

1 D+' &'

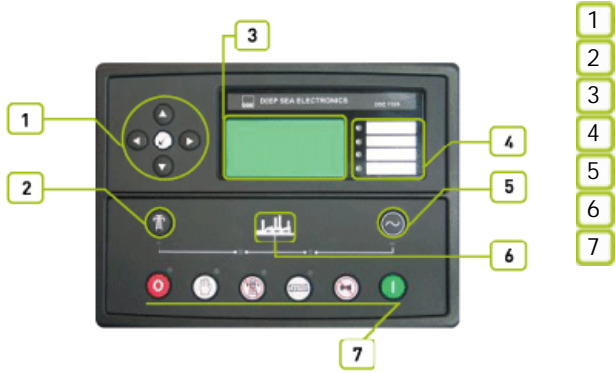

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fI
 &&\$ ž
 "8G9+' &\$
 "8G9+' &\$
 ž
 % &1 *(' fI
 žFG' &žFG(,) ž
 ž

AD 825

Doosan
Mecc Alte
D+' &'

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '*\$-)\$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

f&)(, t

f&%) +t

f&% \$t

GA 8

!&+""

"

%, !&*(

)
&(\$)

ž


ž

ž

ž

AD 825

Doosan
Mecc Alte
D+ &''

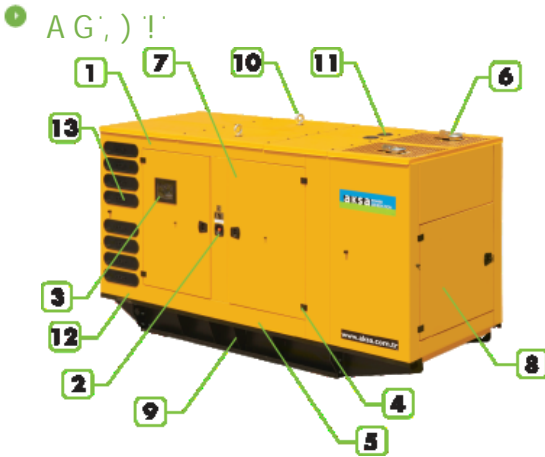

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000